

# MyIC for iPad

## Demo Mode walkthrough

### Purpose:

Demo mode is intended to be used to demonstrate the functionality of MyIC for iPad, when a connection to the Alu test environment is not possible.

### Requirements:

Connection to internet by WiFi or 3G, is needed to demonstrate the quick conference.  
All other features do not require internet connectivity.

Access to My Teamwork is not needed to demonstrate the functionality in Demo mode.



## General Automated Demo

### Demo Control Buttons

**Play** - will automatically add people to the conference

**Stop** - will end the demo session

**Add** - add individual users to a session

**Remove** - remove a single user from a session





## Step 1 - Connection

In Settings goto Apps and select MyIC.


To use MyIC in demo mode please set Sim Mode 'On'.



## Step 2 - Presence

It is possible to show the various presence states that may be selected with a live connection.

Simply click on Connection to show them.

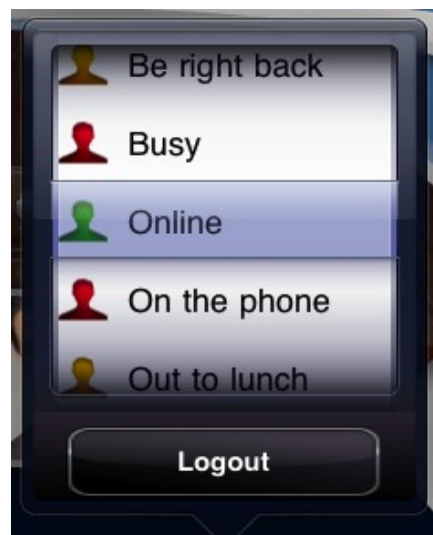




### Step 3 - Contacts

Click on the contacts icon to display Local contacts from your iPad address book or Remote to display a simulated ACS buddy list.

To demonstrate drag'n'drop.  
Press and hold your finger on a contact.  
Then drag it to the table, releasing your finger.

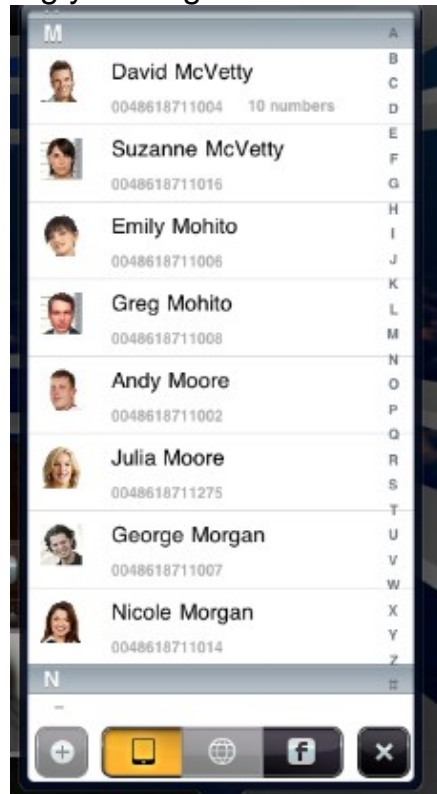

### Step 4 - Conference List

Simply click on Conference List to display a list of Conference.

quickCallConf	scheduled	0	2/25/11 8:25 AM	6 hrs
quickCallConf	scheduled	0	2/24/11 1:58 PM	6 hrs
quickCallConf	scheduled	0	2/24/11 1:18 PM	6 hrs
quickCallConf	scheduled	0	2/24/11 1:02 PM	6 hrs
dfsdfsdf	scheduled	0	2/21/11 3:30 PM	1 hrs
ALU exhibition demo conference	reservationless	0	2/21/11 12:00 AM	871...
test	scheduled	0	2/4/11 4:29 PM	1 hrs

### Step 5 - Calling and Conference Demonstration (Internet access= WiFi only needed)

To make a call click on Quick Conference.

Enter a single number to make a call to a single participant.

For more information about MyiC, please visit:  
<http://www.call4mac.com/MyiC/>

Email: sales@xdsnet.de  
Phone: +49 (40) 897020

Xnet Communications GmbH  
Stresemannstr. 375 / Haus 3  
D-22761 Hamburg  
Germany



Enter a number for the second participant to make a 3 way conference.  
After pressing call your specified phone will ring.  
When you answer the other participants will be called in turn.


My phone: 4422  
Participant 1: 4277  
Participant 2:   
Cancel Call

### Step 6 - Instant Messaging

Click Instant Messages.

Click on the top left contact icon and select 'demo user.'

Click on the bottom textfield, enter a message, click send - simulation of sending message is performed and demo agent will reply with a random message.

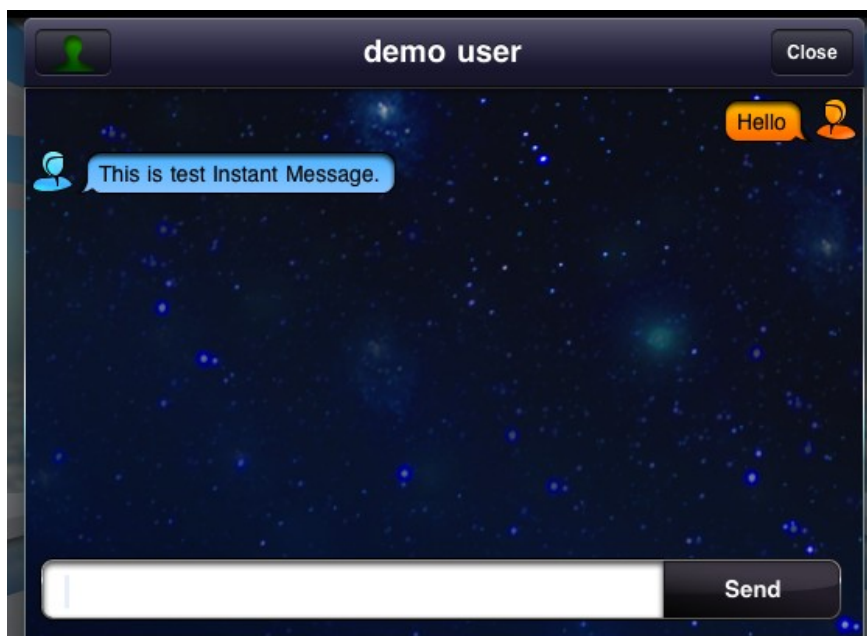

### Step 7 – Conference Functionality

Edit Conference Participant

For more information about MyiC, please visit:  
<http://www.call4mac.com/MyiC/>


Email: sales@xdsnet.de  
Phone: +49 (40) 897020

Xnet Communications GmbH  
Stresemannstr. 375 / Haus 3  
D-22761 Hamburg  
Germany



Press the person's image and it will rotate 360 degrees to reveal the edit options:

1. Remove participant
2. Contact Information
3. On Hold – place participant on hold, press again to take off hold.
4. Mute – temporarily mute the participant, press again to unmute.

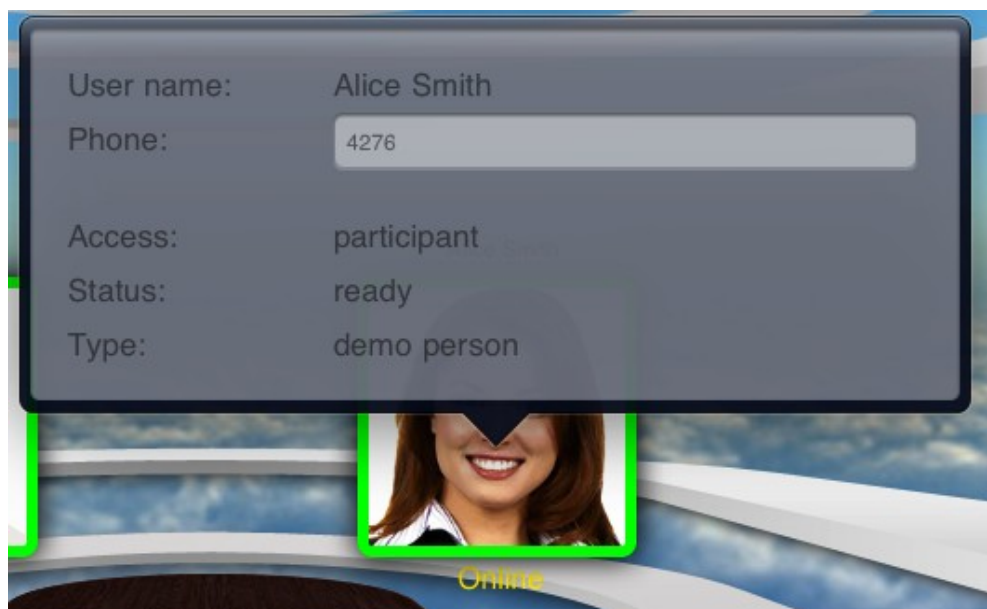

For more information about MyiC, please visit:  
<http://www.call4mac.com/MyiC/>

Email: sales@xdsnet.de  
Phone: +49 (40) 897020

Xnet Communications GmbH  
Stresemannstr. 375 / Haus 3  
D-22761 Hamburg  
Germany